


The KYTOLA Variable Area Flow Meter Model K is a reliable instrument for measuring and monitoring of medium range flows of liquids and gases.

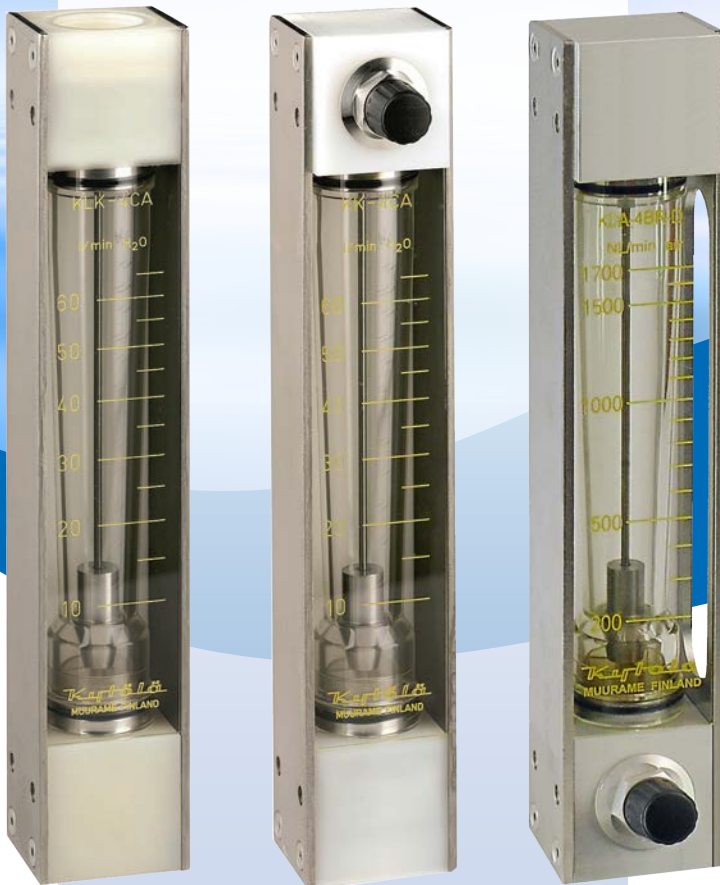

- For liquid or gas
- Large selection of materials
- Scales up to
10 – 120 L/min (H₂O) or
400 – 3000 NL/min (Air)
- Connections BSP or NPT 1"

ISO 9001:2008 ISO 14001:2004

FLOW METER KL, K, KD

FEATURES

Sturdy construction with protected flow tube

Models K and KD with built-in flow adjustment valve

Stainless steel side plates

TYPICAL APPLICATIONS

Sealing water measurements for vacuum pumps

Lubrication oil measurements

Gas flow measurements

Flush water applications

OPTIONS

Scales for alternative liquids and gases

PES flow tube

Viton® or EPDM seals

Quick change flow tube

Low and/or high flow alarm

Model	KLA	KLH	KLK
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight	1.9 kg	3.1 kg	1.4 kg
Flow tube	Grilamid (PA-12) (*PES)		
Connections	BSP 1" or NPT 1"		
Float	AISI 329		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		

*Special construction on request

KL - - -

End Block Material

Aluminium (not for H ₂ O)	A
AISI 316	H
Nylon	K

Flow Range

H ₂ O L/min	Air NL/min	
7.5 – 40	200 – 1200	4A
10 – 55	200 – 1500	4B
10 – 65	300 – 1800	4C
10 – 85	400 – 2200	4D
10 – 120	400 – 3000	4E



Scale

H ₂ O (L/min) at +20°C	A
Air (NL/min) at +20°C/101.3 kPa	R

Special Feature

Alarm readiness	D
BSP connections	<i>blank</i>
NPT connections	N
Grilamid flow tube, nitrile seals	<i>blank</i>
PES flow tube, nitrile seals	V
PES flow tube, Viton® seals	W
Grilamid flow tube, Viton® seals	X

Standard feature: leave *blank*
Special feature: choose Character

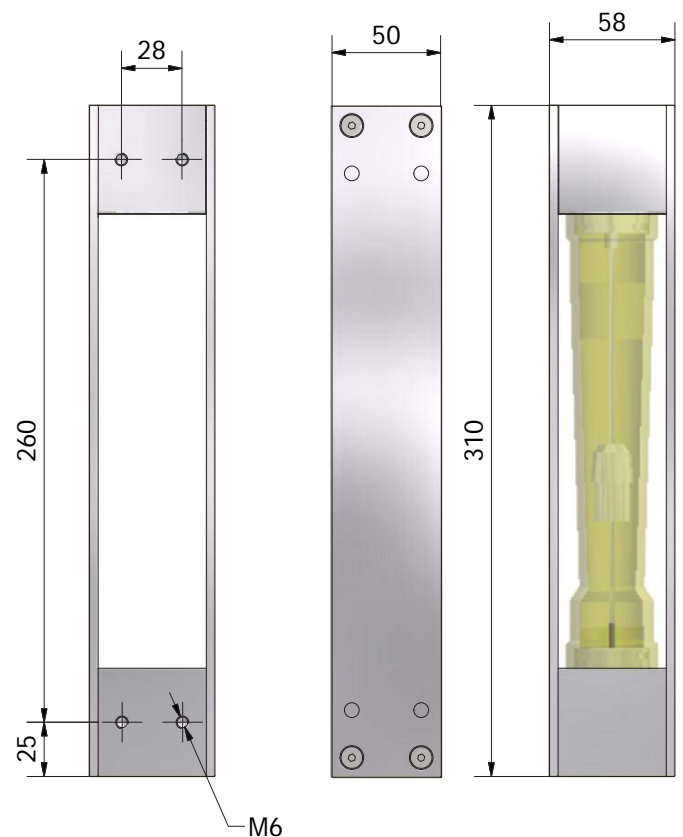

Model	KA	KH	KK
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight	1.9 kg	3.1 kg	1.4 kg
Valve housing	Aluminium	AISI 316	AISI 316
Valve spindle	AISI 316	AISI 316	AISI 316
Flow tube	Grilamid (PA-12) (*PES)		
Connections	BSP 1" or NPT 1"		
Float	AISI 329		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		

*Special construction on request

K ■ - ■ - ■

End Block Material

Aluminium (not for H ₂ O)	A
AISI 316	H
Nylon	K

Flow Range

H ₂ O L/min	Air NL/min	
7.5 – 40	200 – 1200	4A
7.5 – 55	200 – 1600	4B
10 – 65	200 – 1800	4C
10 – 85	400 – 2600	4D
10 – 120	400 – 2800	4E


Scale

H ₂ O (L/min) at +20°C	A
Air (NL/min) at +20°C/101.3 kPa	R

Special Feature

Alarm readiness	D
BSP connections	blank
NPT connections	N
Grilamid flow tube, nitrile seals	blank
PES flow tube, nitrile seals	V
PES flow tube, Viton® seals	W
Grilamid flow tube, Viton® seals	X


Standard feature: leave *blank*
 Special feature: choose Character

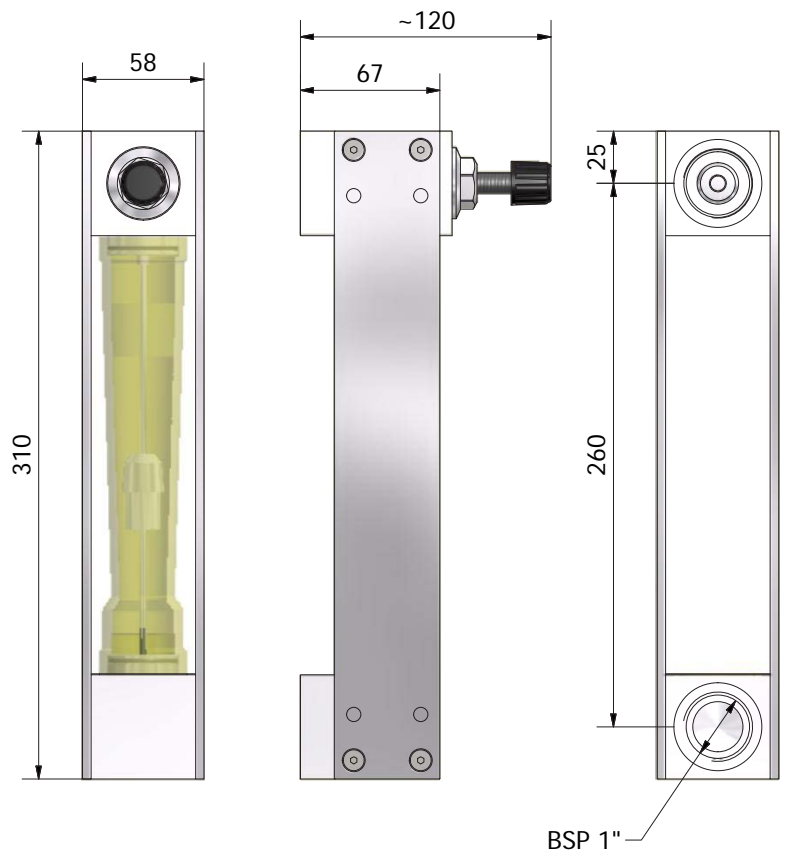

Model	KDA	KDH	KDK
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight	0.75 kg	2.00 kg	0.95 kg
Valve housing	Aluminium	AISI 316	AISI 316
Valve spindle	AISI 316	AISI 316	AISI 316
Flow tube	Grilamid (PA-12) (*PES)		
Connections	BSP 1" or NPT 1"		
Float	AISI 329		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±10% F.S.		

*Special construction on request

KD				
End Block Material				
Aluminium	A			
AISI 316	H			
Nylon	K			
Flow Range				
Air NL/min				
200 – 1200	4A			
200 – 1700	4B			
300 – 2000	4C			
400 – 2600	4D			
400 – 3000	4E			
Scale				
Air (NL/min) at +20°C/101.3 kPa		R		
Special Feature				
Alarm readiness			D	
BSP connections		<i>blank</i>		
NPT connections			N	
Grilamid flow tube, nitrile seals		<i>blank</i>		
PES flow tube, nitrile seals			V	
PES flow tube, Viton® seals			W	
Grilamid flow tube, Viton® seals			X	
Standard feature: leave <i>blank</i>				
Special feature: choose Character				

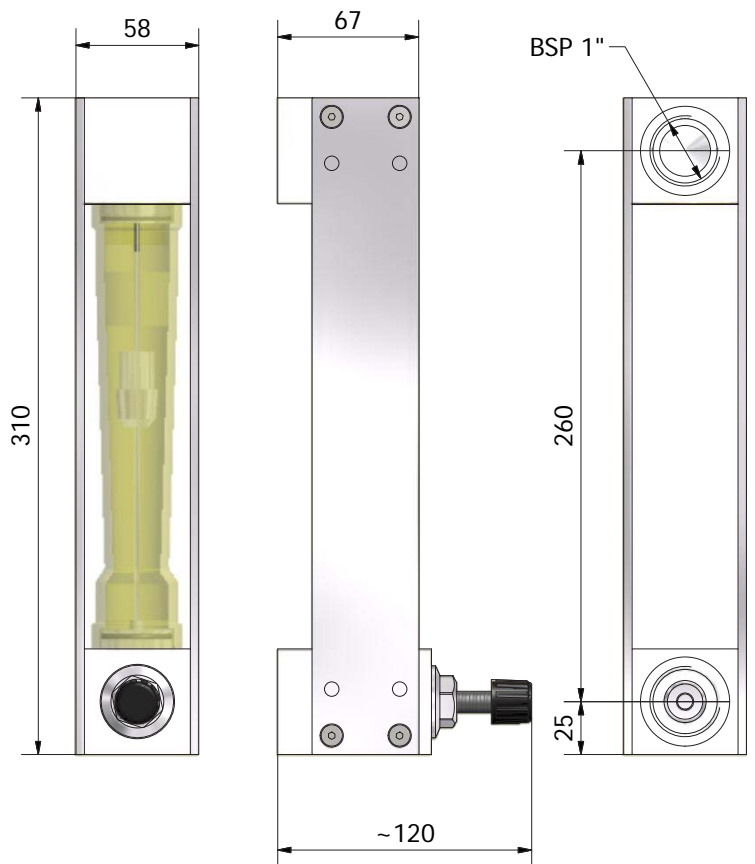

Copyright © Kytola Instruments Oy 2016. Dimensions and measurements are given within normal tolerances. Manufacturer reserves the right to changes without prior notification. Published 2/2016.



www.kytola.com

Kytola Instruments Oy
 Olli Kytölään tie 1
 FI-40950 Muurame, Finland
 Tel. +358 20 779 0690
 Fax +358 14 631 419
 E-mail info@kytola.com