


KYTOLA® variable area flow meter model K Smart with mA output signal is ideal for applications and environments that benefit from both visual flow reading on site and remote flow rate monitoring in an automation system or control room.

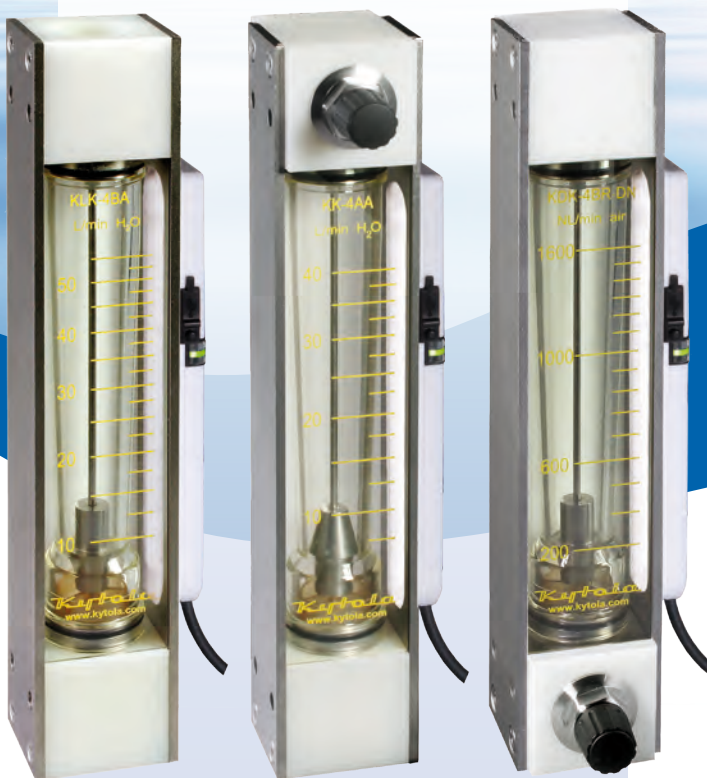

- Safe and reliable visual flow reading and verification through a transparent flow tube
- 4-20 mA output signal for remote monitoring
- No sensors in contact with the fluid
- Reliable measurement of fluids with contaminants
- Sturdy impact resistant construction
- Customer-specific scales for real operating conditions

ISO 9001 ISO 14001

FLOW METER K Smart

FEATURES

- 4 – 20 mA output, 3-wire
- Alarm LEDs for flow alarm indication
- Compensation for external electro-magnetic field effects
- USB-C port for parameter settings
- Configuration with VA Config application




TYPICAL APPLICATIONS

- Cooling water measurement
- Seal water measurement
- Flush water applications
- Air and gas flow measurement


OPTIONS

- With or without flow adjustment valve
- Optional materials for specific applications
- Inductive flow alarm sensor for low and high flow alarms




Model	KLAS	KLHS	KLKS
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight, incl. mA transmitter	2.0 kg	3.2 kg	1.5 kg
Flow tube	Grilamid (PA-12) (*PES)		
Connections	G 1" or NPT 1"		
Float	AISI 329 Note! Other possible wetted metal parts: AISI 316		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		
*Special construction on request			

mA transmitter VA Smart	
Power supply	24 VDC / 0.1 A
Local alarm LEDs	Green (blinks): within set limits  Yellow: high flow alarm  Red: low flow alarm 
Enclosure	Polyamide
Ambient temperature	0...+80°C
Protection class	IP65

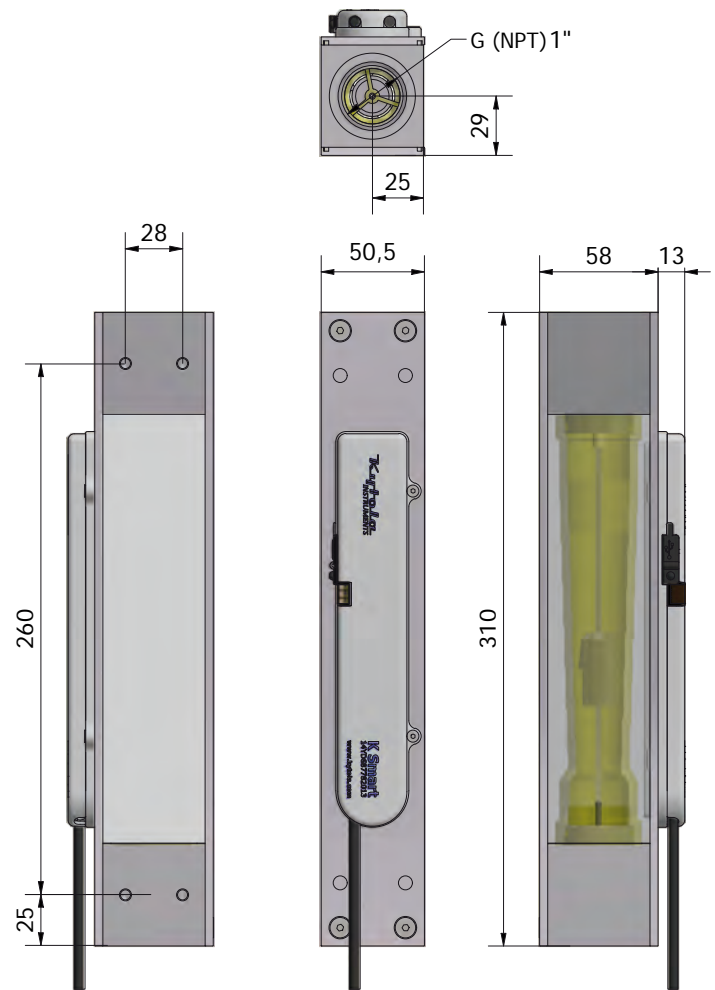KL	S	M
End Block Material		
Aluminium (not for H ₂ O)	A	
AISI 316	H	
Nylon	K	
Flow Range		
H ₂ O L/min	Air NL/min	
7.5 – 40	200 – 1200	4A
10 – 55	200 – 1500	4B
10 – 65	300 – 1800	4C
10 – 85	400 – 2200	4D
10 – 120	400 – 3000	4E
Scale		
H ₂ O (L/min) at +20°C		A
Air (NL/min) at +20°C/1.013 bar (abs)		R
4 – 20 mA output		
Features		
Ready for inductive flow alarm sensor		D
G 1" connections	blank	
NPT 1" connections		N
Grilamid flow tube, nitrile seals	blank	
PES flow tube, nitrile seals		V
PES flow tube, Viton® seals		W
Grilamid flow tube, Viton® seals		X
Standard feature: leave blank Special feature: choose character		



Model	KAS	KHS	KKS
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight, incl. mA transmitter	2.0 kg	3.2 kg	1.5 kg
Valve housing	Aluminium	AISI 316	AISI 316
Valve spindle	AISI 316	AISI 316	AISI 316
Flow tube	Grilamid (PA-12) (*PES)		
Connections	G 1" or NPT 1"		
Float	AISI 329		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +20°C)		
			*Special construction on request

mA transmitter VA Smart	
Power supply	24 VDC / 0.1 A
Local alarm LEDs	Green (blinks): within set limits  Yellow: high flow alarm  Red: low flow alarm 
Enclosure	Polyamide
Ambient temperature	0...+80°C
Protection class	IP65

K **S** **-** **M**

End Block Material		
Aluminium (not for H ₂ O)	A	
AISI 316	H	
Nylon	K	


Flow Range			
H ₂ O L/min	Air NL/min		
7.5 – 40	200 – 1200	4A*	
7.5 – 55	200 – 1600	4B*	
10 – 65	200 – 1800	4C*	
10 – 85	400 – 2600	4D*	
10 – 120	400 – 2800	4E*	

Scale		
H ₂ O (L/min) at +20°C	A	
Air (NL/min) at +20°C/1.013 bar (abs)	R	

4 – 20 mA output

Features		
Ready for inductive flow alarm sensor	D	
G 1" connections	<i>blank</i>	
NPT 1" connections	N	
Grilamid flow tube, nitrile seals	<i>blank</i>	
PES flow tube, nitrile seals	V	
PES flow tube, Viton® seals	W	
Grilamid flow tube, Viton® seals	X	



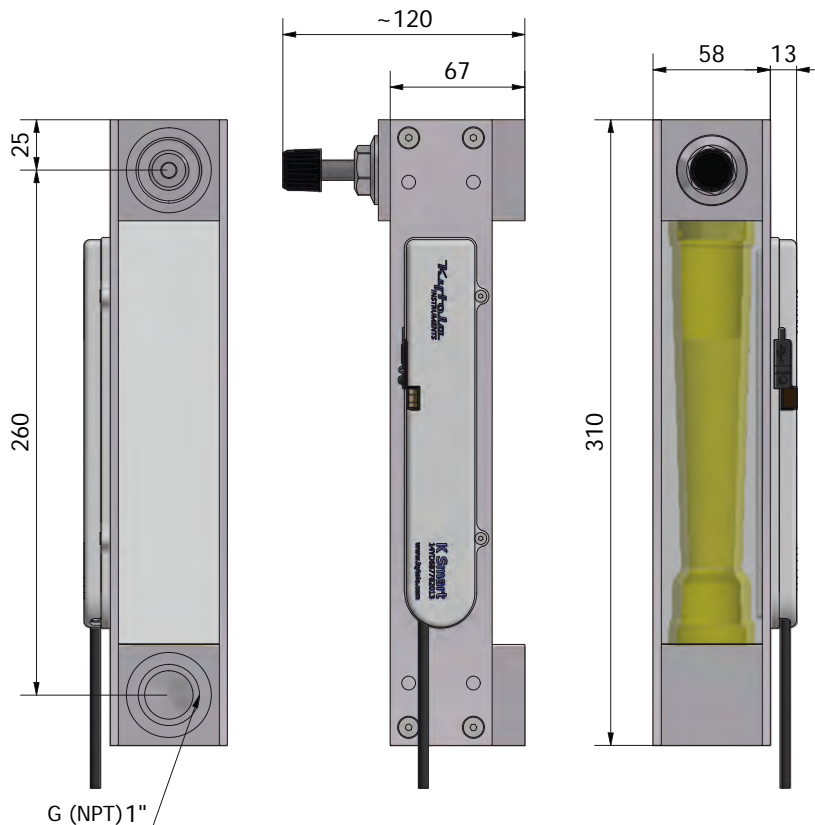

Standard feature: leave *blank*
Special feature: choose character




* Air flow ranges (20°C/1.013 bar abs) for calibration purposes only

Model	KDAS	KDHS	KDKS
End blocks	Aluminium	AISI 316	Nylon
Side plates	AISI 316	AISI 316	AISI 316
Max. pressure	30 bar	30 bar	20 bar
Max. temperature	80°C (*120°C)	80°C (*120°C)	80°C
Weight, incl. mA transmitter	2.0 kg	3.2 kg	1.5 kg
Valve housing	Aluminium	AISI 316	AISI 316
Valve spindle	AISI 316	AISI 316	AISI 316
Flow tube	Grilamid (PA-12) (*PES)		
Connections	G 1" or NPT 1"		
Float	AISI 329		
Seals	Nitrile (*Viton®, EPDM)		

*Special construction on request

mA transmitter VA Smart	
Power supply	24 VDC / 0.1 A
Local alarm LEDs	Green (blinks): within set limits  Yellow: high flow alarm   Red: low flow alarm 
Enclosure	Polyamide
Ambient temperature	0...+80°C
Protection class	IP65

KD S - M	
End Block Material	
Aluminium	A
AISI 316	H
Nylon	K
Flow Range	
Air NL/min	
200 – 1200	4A
200 – 1700	4B
300 – 2000	4C
400 – 2600	4D
400 – 3000	4E
Scale	
Air (NL/min) at +20°C/1.013 bar (abs)	R
4 – 20 mA output	
Features	
Ready for inductive flow alarm sensor	D
G 1" connections	blank
NPT 1" connections	N
Grilamid flow tube, nitrile seals	blank
PES flow tube, nitrile seals	V
PES flow tube, Viton® seals	W
Grilamid flow tube, Viton® seals	X
Standard feature: leave blank	
Special feature: choose character	

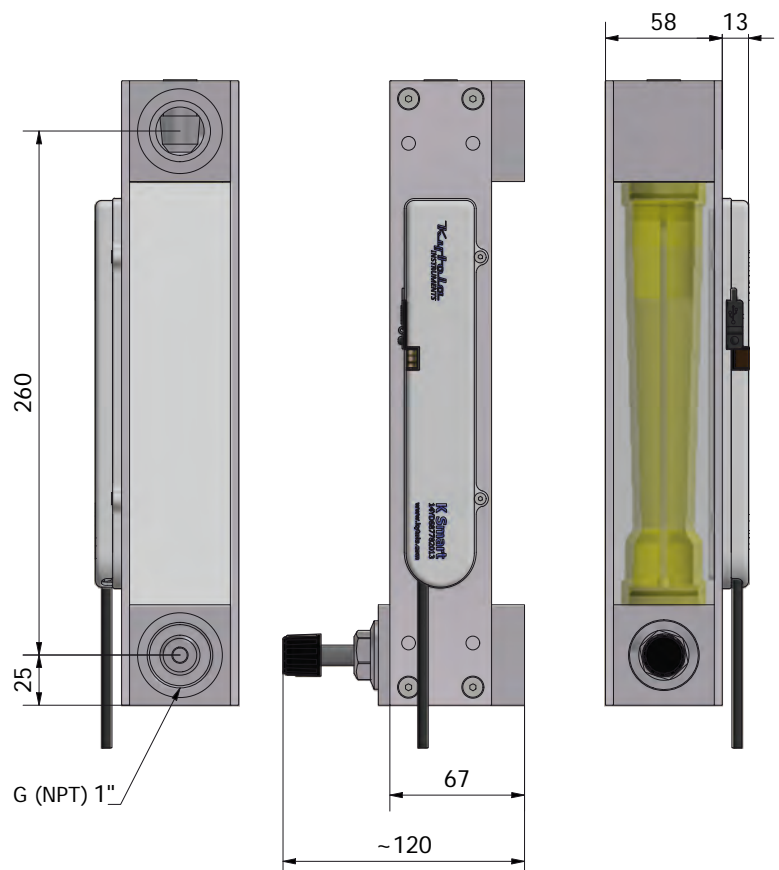

Copyright © Kytola Instruments Oy 2022. Dimensions and measurements are given within normal tolerances. Manufacturer reserves the right to changes without prior notification. File: KSmart_es10_en Published 11/2022.